

PCT/CA 03/00446
25 April 2003 (25.04.2003)

REC'D 23 MAY 2003

WIPO

PCT

PA 988140

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

April 03, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/367,748

FILING DATE: March 28, 2002

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

M. K. HAWKINS
Certifying Officer

BEST AVAILABLE COPY

Please type a plus sign (+) inside this box 

PTO/SP-18 (8-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)

Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
Lotfollah Cyrus	SHAFAI SHAFAI	Winnipeg, Canada Winnipeg, Canada


☐ Additional inventors are being named on the _____ separately numbered sheets attached hereto**TITLE OF THE INVENTION (280 characters max)**

MULTIPLE FREQUENCY ANTENNA

Direct all correspondence to:

CORRESPONDENCE ADDRESS

Customer Number

Place Customer Number
Bar Code Label here

OR

Type Customer Number here

Firm or
Individual Name

Adams Cassan Maclean

Address

P.O. Box 11100

Address

City Ottawa

State

Ontario

Zip

K2H 7T8

Country Canada

Telephone

(613) 828 0012

Fax

(613) 828 0024

ENCLOSED APPLICATION PARTS (check all that apply)

Specification Number of Pages

5



CD(s), Number



Drawing(s) Number of Sheets

2



Other (specify)

Claims 9, Abstract



Application Data Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT

Applicant claims small entity status. See 37 CFR 1.27.



A check or money order is enclosed to cover the filing fees



The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:

20-0771



Payment by credit card. Form PTO-2038 is attached.

FILING FEE
AMOUNT (\$)

160.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.




No.



Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE



Thomas Adams

TYPED or PRINTED NAME

(613) 828 0012

TELEPHONE

Date

03/28/02

REGISTRATION NO.

(if appropriate)

Docket Number:

31078

AP930USP

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

BEST AVAILABLE COPY

MULTIPLE FREQUENCY ANTENNA

DESCRIPTION

5 TECHNICAL FIELD:

This invention relates to antennas that are tunable over a range of operating frequencies and is especially applicable to antennas for wireless communications devices.

BACKGROUND ART:

- 10 Wireless communications devices, which include cellular/mobile telephones, portable telephones, global satellite communications transceivers, paging devices, so-called personal digital assistants, laptop/notebook computers, and so on are proliferating. It is sometimes desirable for antennas of such devices to be capable of operation at different frequencies. For example, as explained in US patent number 6,204,826, cellular/mobile telephones may need
- 15 to operate within different systems, such as the Global System of Mobile communications (GSM), which typically uses a frequency band from 880 MHz to 960 MHz, and the Digital Communications System (DCS) which typically uses a band between 1710 MHz and 1880 MHz.

- Antennas of portable/mobile equipment must be relatively small, so they usually are
- 20 relatively narrowband. It is known, therefore, to design such antennas to have more than one resonance frequency, facilitating operation in more than one frequency band. Thus, US6,204,826 discloses an antenna comprising a meandering conductive trace formed upon a dielectric substrate. The trace comprises two segments which couple with each other to provide two distinct resonance frequencies. Likewise, US published patent application
- 25 number 2002/0014996 discloses an antenna having a resonator element to which the signal feed can be connected at different locations according to the frequency range at which the antenna is to operate.

- These arrangements are not entirely satisfactory, however. A cellular telephone system might assign different frequencies to different cells and/or users. In a similar manner,
- 30 a portable domestic telephone might be capable of selecting different channels within a prescribed band for communication with its own base station. In either case, the antenna still must be sufficiently broadband to accommodate the whole of the band concerned, which limits sensitivity and/or range. Wireless systems generally have limited bandwidth, and numbers of users are increasing rapidly, so co-channel interference is a major problem.
- 35 Consequently, there is a need for an antenna which can provide satisfactory performance over

2025748-022002

An object of the present invention is to at least ameliorate the problems associated with such known antennas, or at least provide an alternative

SUMMARY OF THE INVENTION:

The control means may comprise an electrode, e.g. a ground plane for the antenna. Alternatively, the electrode may be provided in addition to a ground plane.

The means for effecting a change in spacing may comprises a second electrode and circuitry for applying a potential difference between the membrane and the second electrode so as to deflect the membrane electrostatically relative to the electrode.

BRIEF DESCRIPTION OF THE DRAWINGS:

Figure 1 is a detail sectional side view of an antenna element having a flexible
25 membrane for tuning of the antenna over a continuous range of resonance frequencies;

Figures 3 and 4 are sectional views of alternative membranes; and

30

Referring to Figures 1 and 2, an antenna comprises an antenna element, in the form of a microstrip patch antenna element 11, formed upon the surface of a multilayer printed circuit board 12 having an uppermost dielectric layer 13, a lowermost dielectric layer 14, and a middle dielectric layer 15. The materials used for the layers may be whatever is suitable for the fabrication process to be used. For example, if chemical etching (micromachining) is to

be used, the layer may be glass. Alternatively, if numerically controlled machining is used, the layers might be other insulating material, such as a combination of Teflon and fiberglass, as marketed under the trade mark Duroid.

A microstrip feed line 16, also formed upon the surface of layer 13, couples the antenna element 11 to a transmitter/receiver 26 which communicates RF signals to/from the antenna element 11. For the purposes of description, it will be assumed that the antenna is used to transmit signals, in which case the antenna element 11 is a radiator element, but it will be appreciated that it could be used to receive signals too.

A rectangular conductive ground plane 17 having a very thin central membrane portion 17A and thicker margins 17B extends subjacent the dielectric substrate 13 and is spaced from its lower surface by a thin rectangular spacer 18 having a central opening leaving a narrow air gap 19 between the underside of the dielectric substrate 13 and the membrane portion 17A. The membrane portion 17A may be a thin metal film, such as copper, or a dielectric film with thin metallisation layers on its opposite surfaces.

The ground plane 17 lies upon the upper surface of the middle dielectric layer 15 which itself is supported by the third, lowermost dielectric layer 14. The second dielectric layer 15 has a central rectangular opening 20, conveniently formed by chemical etching or micromachining, forming a cavity 21 extending between the underside of the membrane portion 17A and the upper surface of the lowermost dielectric layer 14.

A plate electrode 22, conveniently formed by metallisation, is provided within the cavity upon the upper surface of the lowermost dielectric layer 14.

The plate electrode 22 is connected by way of a control line 23 to a frequency controller 25 which applies a (d.c.) control voltage V_c between the electrode 21 and the ground plane 17, and hence the conductive membrane portion 17A. When the control voltage V_c is applied, the resulting electrical force between the electrode 22 and the membrane portion 17A causes displacement of the membrane portion 17A towards the electrode 22, and thereby increasing the thickness of the air gap 19 between the membrane portion 17A and the underside of the uppermost dielectric substrate 13. This reduces the effective permittivity of the substrate beneath the microwave patch antenna element 11 and increases its resonance frequency. The radiated field of the patch antenna element 11 experiences an electrical phase change, the magnitude of which is proportional to the displacement of the membrane portion 17A, and therefore dependent upon the magnitude of the control voltage V_c .

Of course, a converse arrangement could be used, with the membrane portion 17A being drawn away from the electrode 22 and decreasing the thickness of the air gap 19.

It should be noted that the spacer 18, and the air gap 19 it creates, are optional. The

membrane 17A could lie directly against the dielectric substrate 13 and be drawn away from it to create the change in resonance frequency.

Air holes may be provided in the uppermost dielectric substrate 13 and/or the lowermost dielectric substrate 14, so as to avoid pressure or vacuum effects resisting movement of the membrane 17A.

It should also be noted that the dielectric layers 13 and 14 and the ground plane 17, with membrane 17A, separate the circuitry for applying the control voltage V_c electrically from the radio frequency circuitry, i.e., the microwave patch antenna element 11 and the feed line 12. Hence, there is an inherent isolation between the control and radio frequency signals, improving the reliability and reducing the cost of implementation.

It should be appreciated that more than one membrane could be used, rather than one.

Also, the spacer 18 could be integral with either the upper dielectric layer 3 or the thicker margin portions 17B of the membranous ground plane 17.

Although the membrane shown in Figure 1 is flat, other configurations are feasible. For example, Figure 3 shows a corrugated membrane 17A', and Figure 4 shows a membrane 17A'' having a flat middle section 23 and a corrugated margin 24. In either case, the corrugations allow the membrane to move without necessarily stretching. Thus, these and other suitable configurations could be used to increase the allowable range of membrane displacement, thus enabling a greater range of operating frequencies.

Figure 5 illustrates, as an example, a graph of the relationship between the radiated field phase and the antenna resonance frequency for a patch antenna element 11 carried by a substrate 13 having a dielectric constant of about 4. The graph shows a change in phase of about 150 degrees for a change in frequency from about 10 GHz to about 11 GHz caused by deflecting the membrane by about one millimeter on average. (N.B The membrane will deflect by different amounts across its width).

While the concomitant change in phase is not of concern here because a single antenna element is involved, it is of significance where a plurality of antenna elements of the kind disclosed herein are employed in a phased array antenna, as disclosed in copending US patent application No. (Attorney docket No. AP890US).

The invention is predicated upon the fact that most antenna elements, such as microwave patches and dipoles, are resonant structures and the resonance frequency is dependent upon the dimensions. It is possible, therefore, to preferentially modify the resonance frequency of the antenna elements. The required dimensional/geometrical modifications are facilitated by micromachining the microstrip patch, or its ground plane, and then using DC voltages to implement the required dimensional/geometrical modifications.

Although the above-described embodiment effects the dimensional/geometrical modifications by flexing a membrane subjacent a patch, it should be appreciated that they could be achieved in other ways. For example, the required dimensional/geometrical modifications could include changing the size of the patch, or its distance from the ground plane, or the location of its feed, or introducing a shorting pin between the patch and its ground plane; or any other change which would effect the required change in resonance frequency.

Thus, it would be possible to move the antenna instead of, or in addition to, the membrane in order to effect the change in the resonance frequency.

10 The antenna elements could be dipoles or other suitable elements whose equivalent circuit is a tuned circuit.

INDUSTRIAL APPLICABILITY

Adjustment of the resonant frequency of an antenna element it to be used for a range of frequencies, or for different bands, e.g., 11.5 GHz to 12.5 GHz. Advantageously, this would reduce the need for a broadband antenna which would receive more noise and require filtering. Embodiments of the invention can be fabricated using techniques or processes similar to those used to create integrated circuits or/and microstrip antennas.

20220719.022809

CLAIMS:

1. An antenna characterized by an antenna element (11) and an adjacent electrode (17A) and control means (22) for effecting a dimensional change of the antenna element and/or
5 between the antenna element and the electrode so as to adjust a resonance frequency of the antenna and tune the antenna for operation at different frequencies.
2. An antenna according to claim 1, characterized in that the electrode comprises a ground plane (17).
- 10 3. An antenna according to claim 1 or 2, characterized in that the electrode comprises a membrane (17A) overlain by the antenna element (11) and the control means comprises means (22) for effecting a change in spacing between the antenna element and membrane.
- 15 4. An antenna according to claim 3, characterized in that the means for effecting a change in spacing comprises circuitry for applying a potential difference (V_p) between the membrane and a second electrode so as to deflect the membrane electrostatically relative to the second electrode.
- 20 5. An antenna according to claim 3 or 4, characterized in that the membrane (17A) comprises a flexible metal film.
6. An antenna according to claim 3 or 4, characterized in that the membrane (17A) comprises at least one conductive coating on a surface of a flexible insulating/dielectric film.
- 25 7. An antenna according to any of claims 3 to 6, characterized in that the membrane (17A) is non-planar.
- 30 8. An antenna according to claim 7, characterized in that the membrane (17A') is corrugated.
9. An antenna according to claim 7, characterized in that the membrane (17A') has a flat middle portion (23) and corrugated marginal portion (24).

2025 RELEASE UNDER E.O. 14176

ABSTRACT OF THE DISCLOSURE

An antenna having a resonant structure, comprises an antenna element (11) and an
5 adjacent electrode (17A) and control means (22,25) for changing a resonance frequency of
the antenna element. The control means may comprise a conductive membrane (17A) spaced
from the antenna element. The resonance frequency then is changed by flexing the
membrane, conveniently by applying a potential difference between the membrane and an
adjacent control electrode.

200203281505

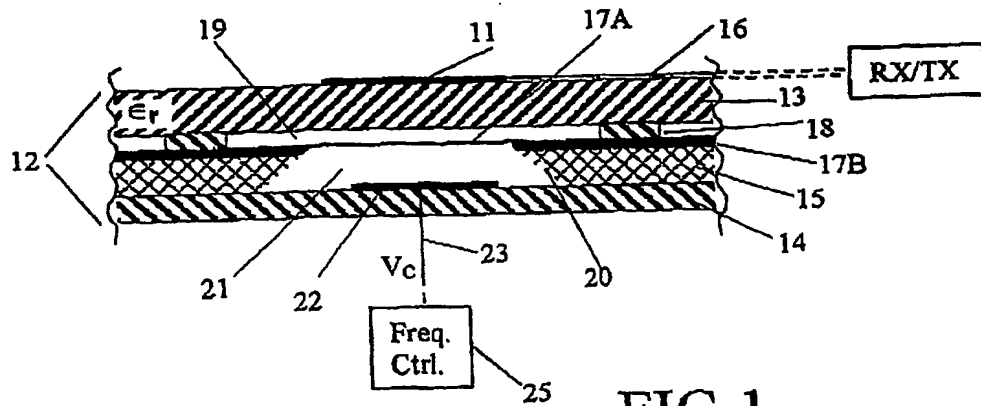


FIG. 1

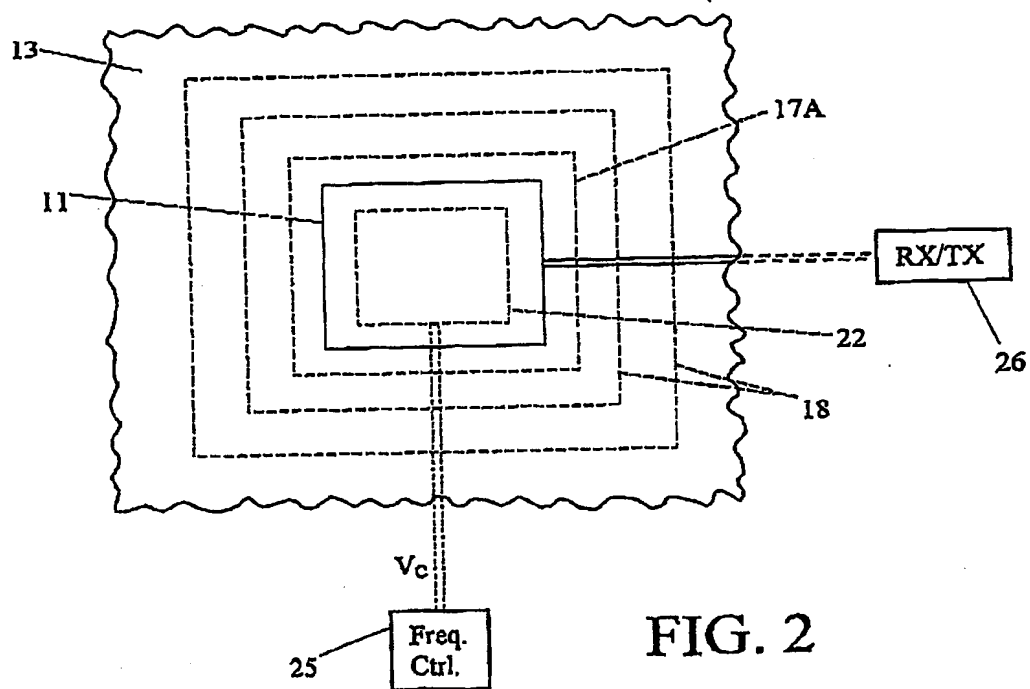


FIG. 2

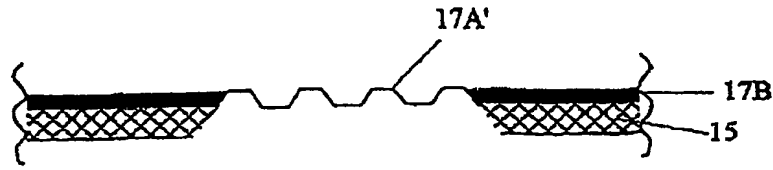


FIG. 3

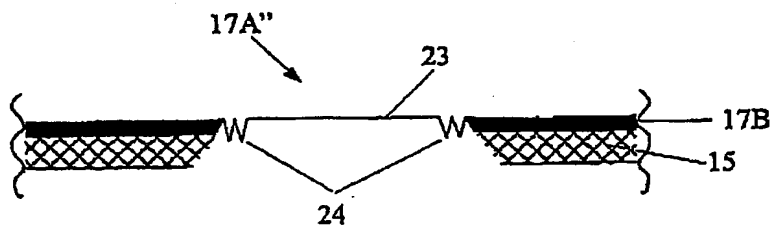


FIG. 4

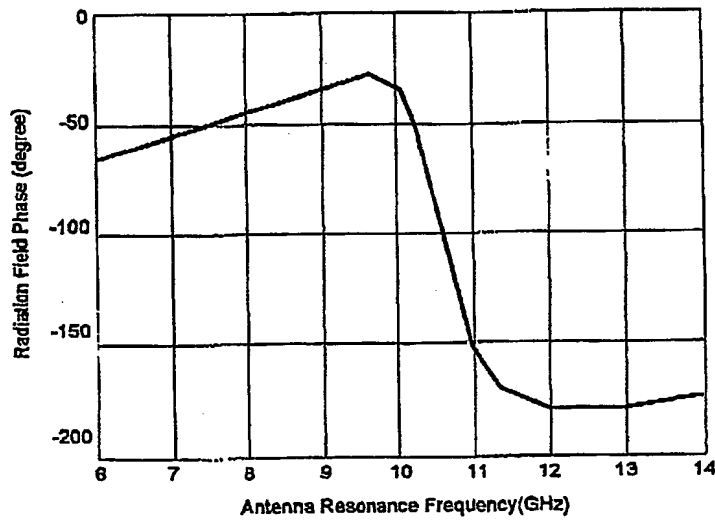


FIG. 5